

***Honeyville***

**Tube Augers**



**Galvanized For Long Life **and** Low Maintenance**

**4" to 10" Diameters with Capacities to 3,000 BPH**




# HONEYVILLE BIN UNLOADING AUGERS

## Features and Specifications

- Auger power heads and screw portion may be moved from bin to bin by removing flange bolts.
- Top design motor mounts with NEMA frame sizes 143, 145, 182, 184, 213, and 215 motor plates.
- All Galvanized construction, G-90 tubing, hot dip galvanized weldments.
- Optional 25° incline transition with shaft mounted u-joint for connecting screws.
- This option elevates the discharge head to easily feed into a transport auger.
- Primary bin well hopper with pivot anchor for bin sweep.
- Optional intermediate thru-hopper for larger bins.
- Totally enclosed belt guard assembly.

Model Number	Capacity BPH	Hopper Size	Tube Diameter	Tube Material	Screw Diameter	Flight Material	Shaft Size	Bearing Specifications
UL6	900	12" Sq x 10-1/2" H	6"	14 ga.	5-3/16"	12 ga.	1"	1" 4 bolt bearings
UL8	2,000	16" Sq x 12-3/4" H	8"	14 ga.	7-1/8"	11 ga.	1-1/4"	1-1/4" 4 bolt bearings
UL10	3,000	20" Sq x 15" H	10"	11 ga.	9"	11 ga.	1-1/2"	1-1/2" 4 bolt bearings

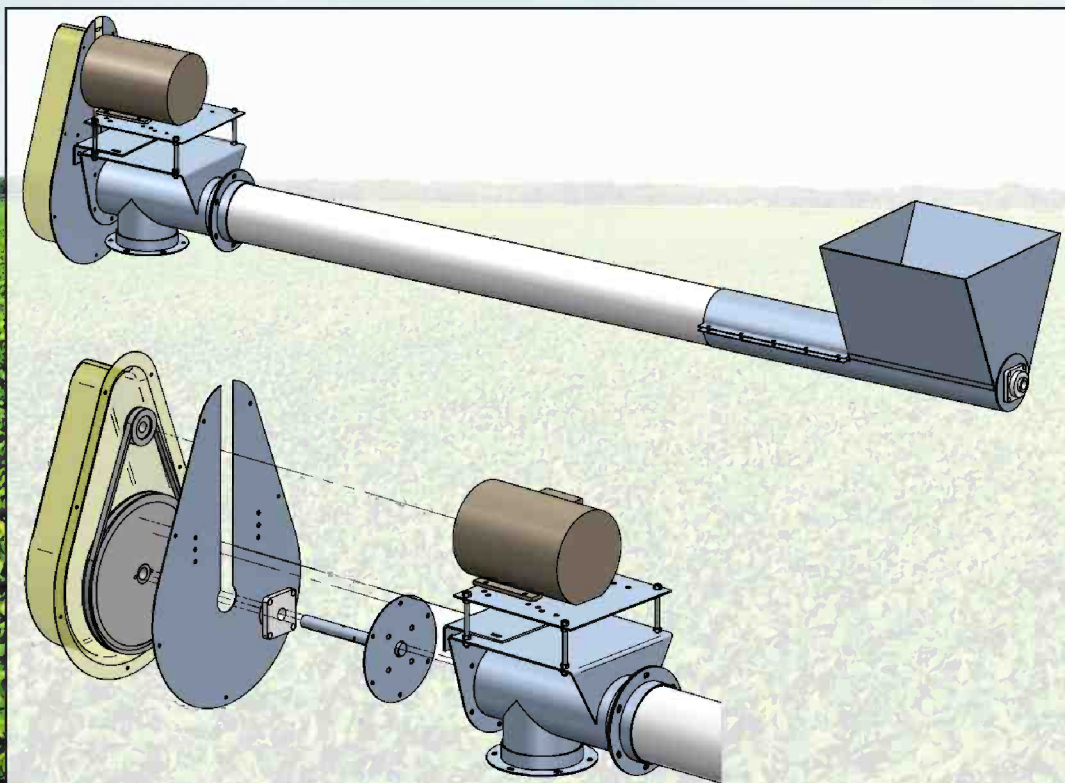

8" Bin Unloading Auger including hopper, overhead



Unloading Auger shown installed with slic

# HONEYVILLE DISTRIBUTING AUGERS

## Features and Specifications

- Top design motor mounts with NEMA frame sizes 143, 145, 182, 184, 213, and 215 motor plates.
- All Galvanized construction, G-90 tubing, hot dip galvanized weldments.
- Stamped steel or cast steel drive sheaves and belt guards.
- Horizontal and incline clamp on hoppers with optional lay on covers.
- Intermediate discharge with slide gate and outlet transitions.
- All components clamp together onto auger tubing eliminating the need for welding.
- Totally enclosed belt guard assembly.

Model Size	Capacity BPH	Tube Diameter	Tube Material	Screw Diameter	Flight Material	Shaft Size	Bearing Specifications
4"	380	4"	16 ga.	3-1/2"	13 ga.	5/8"	5/8" 3 bolt bearings
6"	900	6"	14 ga.	5-3/16"	12 ga.	1"	1" 4 bolt bearings
8"	2,000	8"	14 ga.	7-1/8"	11 ga.	1-1/4"	1-1/4" 4 bolt bearings




shown with standard features in-  
ad motor mount and belt-guard.



Model 67A— 6" distributing auger shown with 18" x 18"  
hopper and optional Intermediate discharge  
with slide gate and outlet transition.



own with optional thru-hopper  
de gate control assembly.

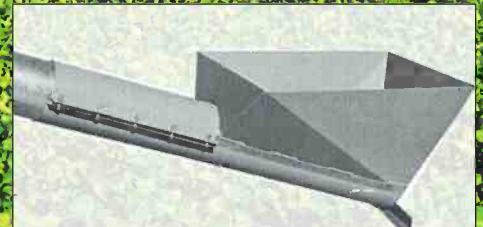

Model 70A—6" Incline auger  
with 18" x 24" hopper.

Honeyville Metal offers a wide variety of tube type conveying augers. As mentioned in this brochure, they are available in 4" to 10" diameters. We also offer a tube type auger in 13", 15" and 17" for special applications on your farm or mill operation. Our tube type augers are just one component in our grain handling product line. This line includes bucket elevators, distributors, flat and incline drag conveyors, u-trough augers, 2 and 4 leg support towers, various catwalk options, truss kits as well as all the components that go with these products. We also offer dust collection systems and components for the mill operation. Check out our website listed below for our complete product line.



## Gently Moving Nature's Grains

Manufactured by



4200S 900W • Topeka, IN 46571  
Phone (800) 593-8377 • Fax (260) 593-2486  
[www.honeyvillemetal.com](http://www.honeyvillemetal.com)